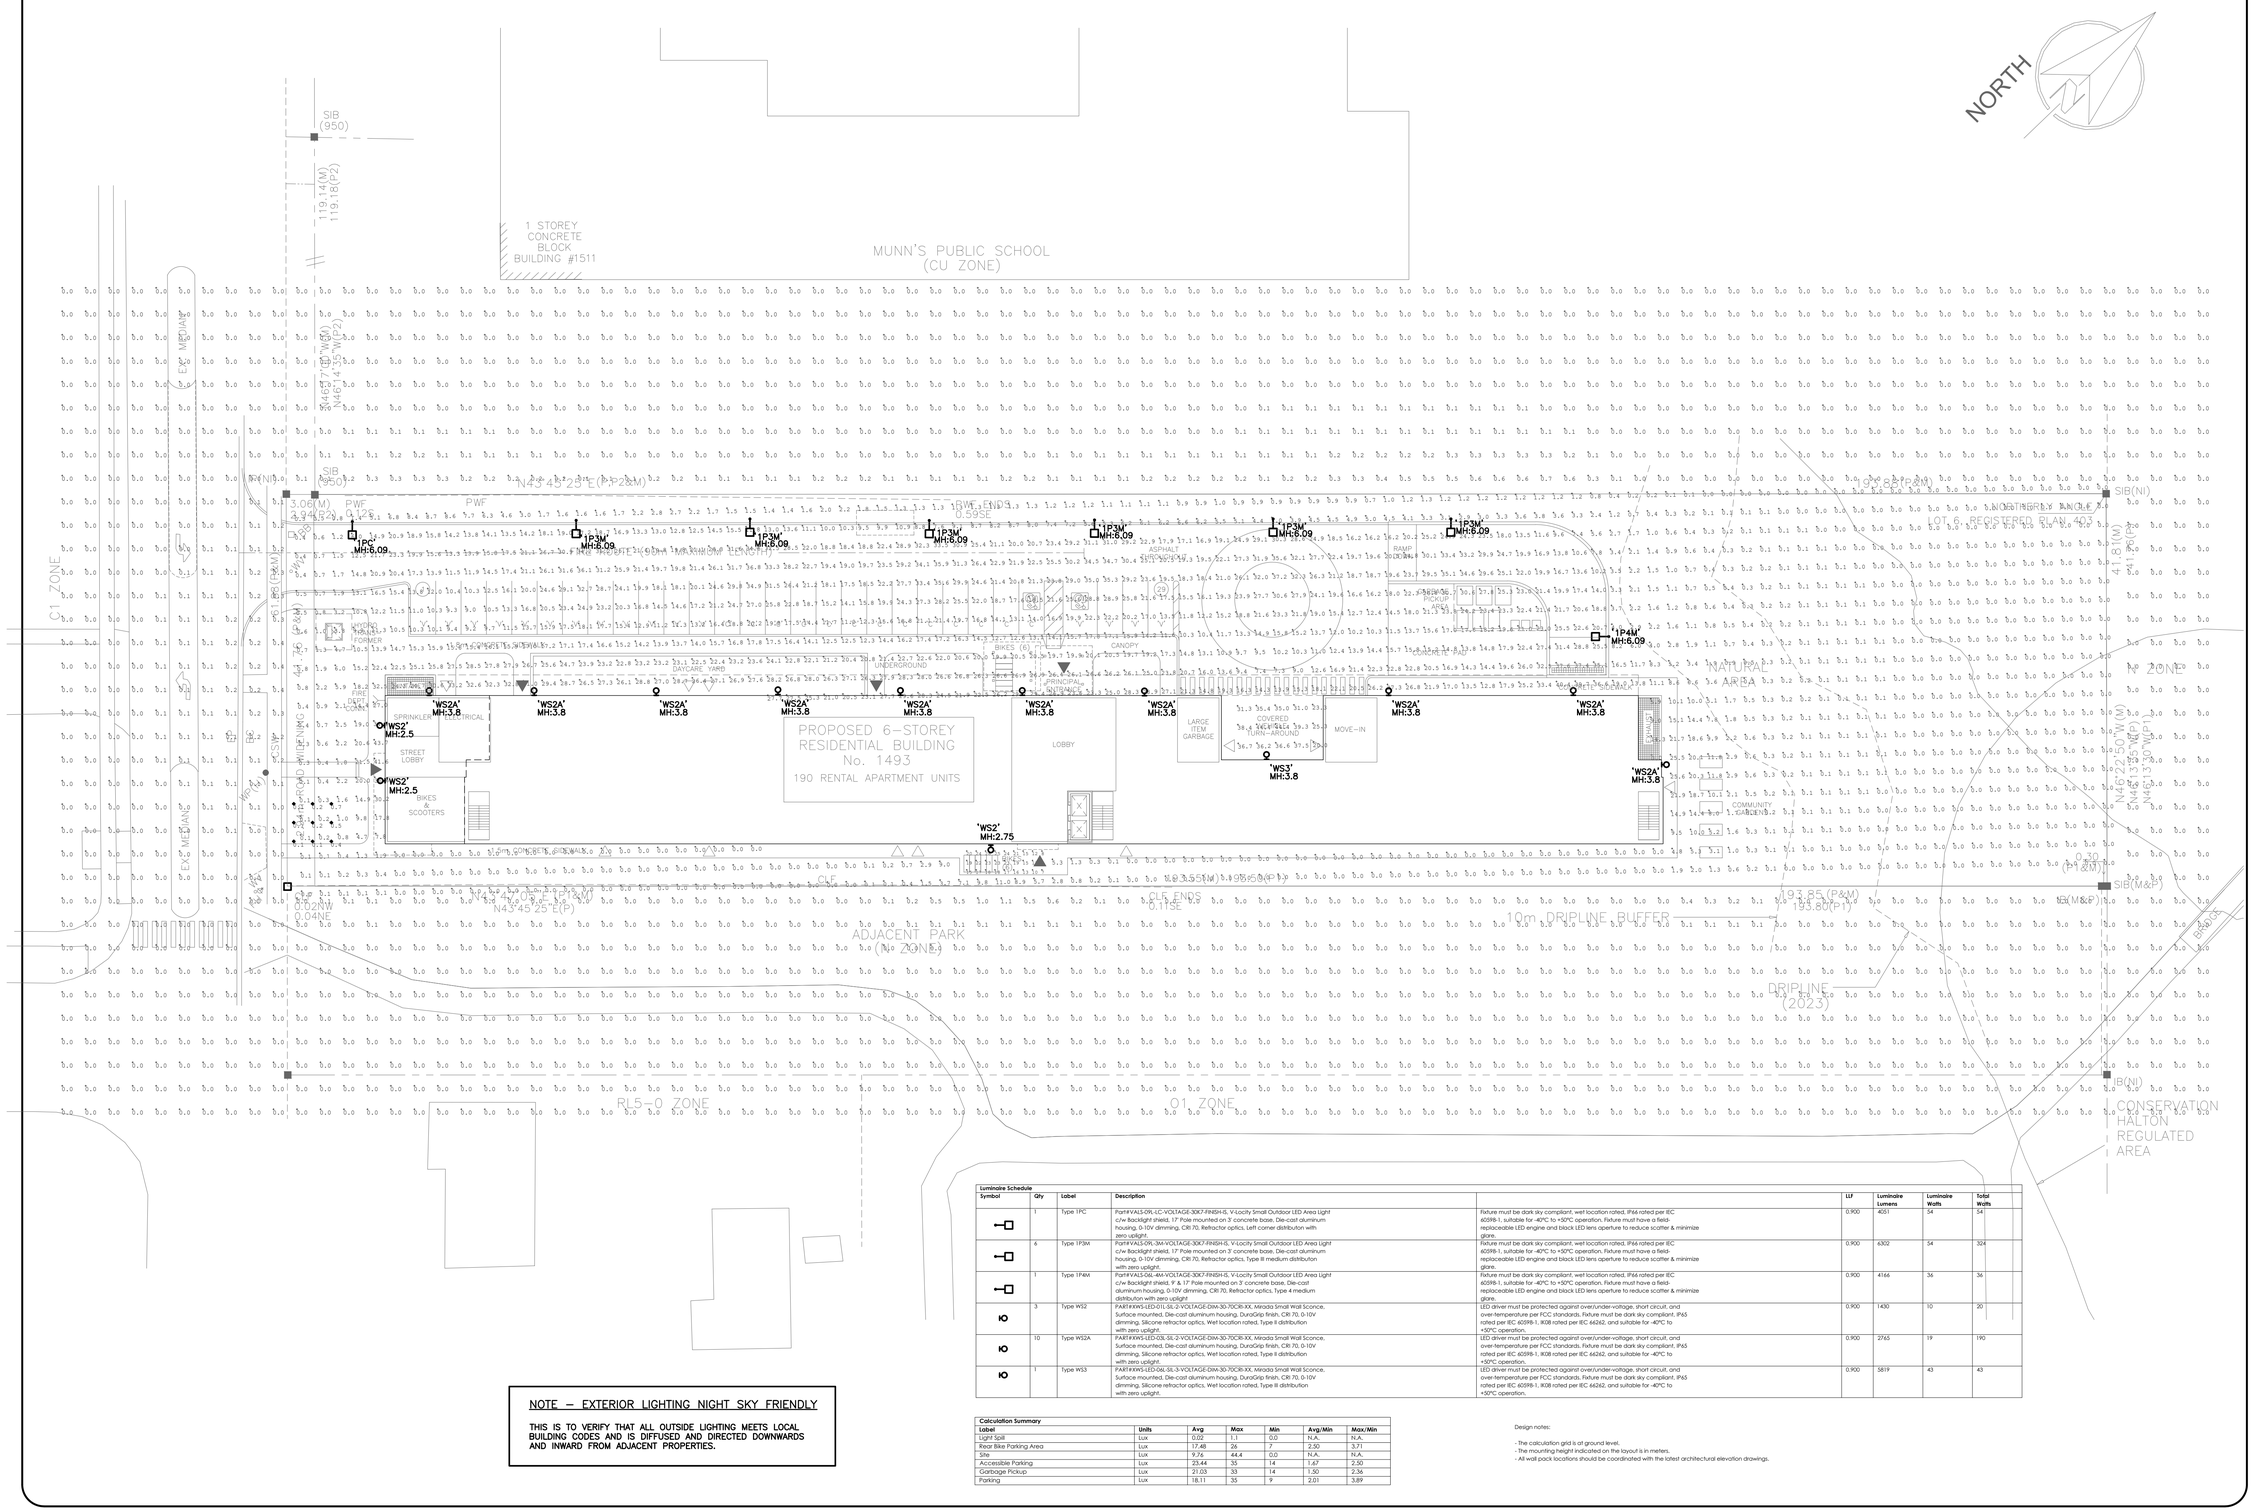
NORTH
SIB (950)
119.14(M)
119.18(P2)
1 STOREY CONCRETE BLOCK BUILDING #1511
MUNN'S PUBLIC SCHOOL (CU ZONE)
N46°57'10"W(M)
N46°43'35"W(P2)
N45°45'25"E(P+P2&M)
SIB (950)
3.06(M)
PWF
PWF
BWE ENDS 0.59SE
CLF ENDS 0.13SE
CLF ENDS 0.19SE
SIB(NI)
41.81(M)
41.91(P2)
LOT 6, REGISTERED PLAN 403
NORTHERLY PANCHE
C1 ZONE
MEDIAN
EXISTING MPAC
EXISTING MPAC
EXISTING MPAC

Catalog # : _____ Project : _____ Type : _____

Prepared By : _____ Date : _____

V-Locity Small (VALS)

Outdoor LED Area Light

IP66

OVERVIEW	
Lumen Package	6,000 - 27,000
Wattage Range	36 - 178
Efficacy Range (LPW)	142 - 171
Weight lbs(kg)	20 (9.1)
Control Options	IMSBT, ALB, ALS, 7-Pin, PCI

QUICK LINKS

Ordering Guide | Performance | Photometrics | Dimensions

FEATURES & SPECIFICATIONS

Construction

- Rugged die-cast aluminum housing contains factory prewired driver and optical units. Cast aluminum wiring access door located underneath.
- Self-contained optic, board and heat sink assembly can be rotated or replaced in the field.
- Fixtures are finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling. Other standard LSI finishes available. Consult factory.
- Shipping weight: TBD lbs in carton.

Optical System

- State-of-the-Art acrylic optics delivers industry leading optical control with an integrated gasket to provide IP66 rated seal.
- Proprietary refractor optics provide exceptional coverage and uniformity in distribution types 2, 3M, 3W, 4M, 4W, 4F, FTM, 5QN, 5QM, 5Q, 5QW, AM, WF and LC/RC.
- Available in 5000K, 4000K, 3500K, 3000K and 2700K color temperatures per ANSI C78.377 as well as phosphor converted amber.
- Minimum CRI of 80 (optional 70 CRI for 5000K and 4000K).
- Factory or field installable integral shielding available for enhanced spill light control.
- Zero Uplight (excludes adjustable arms).

Electrical

- High-performance driver features over-voltage, under voltage, short-circuit and over temperature protection.
- 0-10 volt dimming (10% - 100%) standard, must specify EXT option for dimming leads to be extended to fixture exterior.
- Standard Universal Voltage (120-277 VAC) Input 50/60 Hz or optional High Voltage (347-480 VAC).
- L70 Calculated Life: >60k Hours
- Total harmonic distortion: <20%
- Operating temperature: -40°C to +50°C (-40°F to +122°F).
- Power factor: >.90
- Input power stays constant over life.
- Field replaceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).
- High-efficacy LEDs mounted to metal-core circuit board to maximize heat dissipation
- Driver is fully encased in potting material for moisture resistance and complies with FCC standards. Driver and key electronic components can easily be accessed.

Controls

- Optional integral passive infrared Bluetooth™ motion and photocell sensor. Fixtures operate independently and can be commissioned via iOS or Android configuration app.
- LSI's AirLink™ wireless control system options reduce energy and maintenance costs while optimizing light quality 24/7.

Installation

- REDiMount pole mount arm allows for a true one person installation.
- Side arm pole mount designed to mount to square or round poles.
- Pole mount arms can accommodate pole drill patterns from 2.4 to 5" on center and utilize LSI's reduced B3 or traditional B5 drill patterns.
- Additional mounting options are available including a mast arm or adjustable slip fitter that allow for luminaire attachment to a 2 3/8" tenon or mast arm.
- Adjustable arms allow for 65° of tilt (-5°below horizontal to +60° above horizontal) in 5° increments.

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to https://www.lsicorp.com/resources/terms-conditions-warranty/ for more information.

Listings

- Listed to UL 1598 and UL 8750.
- Meets Buy American Act requirements.
- DarkSky approved with 3000K or warmer color temperature selection (side arm pole and mast arm mounting only).
- Title 24 Compliant; see local ordinance for qualification information.
- Suitable for wet locations.
- IP66 rated Luminaire per IEC 60598-1.
- 3G rated for ANSI C136.31 high vibration applications are qualified.

LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.

FIXTURES TYPE: 1P3M, 1P4M, 1PC

Catalog # : _____ Project : _____ Type : _____

Prepared By : _____ Date : _____

Mirada Small Wall Sconce Silicone (XWS SIL)

Outdoor LED Wall Light

IP65

OVERVIEW	
Lumen Package (lm)	2,000 - 8,000
Wattage Range (W)	13 - 61
Efficacy Range (LPW)	126 - 162
Weight lbs (kg)	10 (4.5)

QUICK LINKS

Ordering Guide | Performance | Photometrics | Dimensions

FEATURES & SPECIFICATIONS

Construction

- Rugged die-cast aluminum housing.
- Fixtures are finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling. Other standard LSI finishes available. Consult factory.
- Extended housing available with 1/2" threaded hubs for surface conduit and rated wire.
- Standard luminaire shipping weight: TBD lbs in carton.
- Max luminaire shipping weight: 12 lbs in carton (20 lbs w/EH option)

Optical System

- State-of-the-Art one piece silicone optic provides industry leading optical control while also acting as an integrated gasket reducing system complexity and improving fixture reliability.
- Proprietary silicone refractor optics provide exceptional coverage and uniformity in distribution types 2, 3, and FT.
- Silicone optical material does not yellow or crack with age and provides a typical light transmittance of 93%.
- Zero uplight.
- Available in 5000K, 4000K, and 3000K color temperatures per ANSI C78.377.
- Minimum CRI of 70

Electrical

- High-performance driver features over-voltage under-voltage, short-circuit, and over temperature protection.
- 0-10V dimming (10% - 100%) standard.
- Standard Universal Voltage (120-277 VAC) Input 50/60 Hz or optional High Voltage (347-480 VAC).
- L70 Calculated Life: >60k Hours
- Total harmonic distortion (THD): <20%
- Operating temperature: -40°C to +50°C (-40°F to +122°F).
- Power factor (PF): >.90
- Input power stays constant over life.
- Optional 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).
- High-efficacy LEDs mounted to metal-core circuit board to maximize heat dissipation
- Driver is fully encased in potting material for moisture resistance. Driver complies with FCC standards. Accessible driver and electrical components.
- Optional battery backup provides 90-minutes of constant power to the LED system, ensuring code compliance. A test switch/indicator button is installed on the housing for ease of maintenance. Standard battery rated for 0°C to 50°C with cold weather battery rated for -20°C to 50°C (40°C max for BL). 120-277V Only.

Controls

- Optional integral passive infrared Bluetooth™ motion. Fixtures operate independently and can be commissioned via iOS or Android configuration app.
- Optional button photocell turns fixtures on and off based on ambient light levels for dusk to dawn lighting.
- LSI's AirLink Blue wireless control system options allow for fixture and motion sensor grouping while reducing energy and maintenance costs.

Installation

- Universal wall mounting plate mounts directly to vertical surface or 4" junction box (octagonal or square).
- Luminaire hinges to the top of the mounting plate and is secured via two flush mount screws that help to conceal the hardware and prevent over tightening during installation.

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to https://www.lsicorp.com/resources/terms-conditions-warranty/ for more information.

Listings

- Listed to UL 1598 and UL 8750.
- Meets Buy American Act requirements.
- IDA compliant; with 3000K color temperature selection.
- Title 24 Compliant; see local ordinance for qualification information.
- Suitable for wet locations.
- IP65 rated luminaire per IEC 60598-1.
- IK08 rated luminaire per IEC 66262 mechanical impact code.
- DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.

FIXTURES TYPE: WS2, WS2A, WS3

REVISIONS

#		DATE
1	ISSUED FOR S.P.A.	AUG25/25
2	FIRST SUBMISSION COMMENTS	NOV25/25
3	SPA COMMENTS #2	JAN22/26
4	2ND SUBMISSION COMMENTS	FEB18/26
5	S.P.A. COORDINATION	MAR09/26

LICENSED PROFESSIONAL ENGINEER
A. K. OBERFELD
90291170
08.25.2025
PROVINCE OF ONTARIO

GENERAL NOTES:

ALL DRAWINGS & SPECIFICATIONS ARE THE PROPERTY OF THE ENGINEER AND CANNOT BE USED OR REPRODUCED WITHOUT HIS APPROVAL.

THE CONTRACTORS SHALL CHECK AND VERIFY ALL DIMENSIONS ON THE SITE AND REPORT ANY DISCREPANCY TO THE ENGINEER.

DO NOT SCALE THE DRAWING.

THE CONTRACTOR WORKING FROM DRAWINGS NOT SPECIFICALLY MARKED "FOR CONSTRUCTION" MUST ASSUME FULL RESPONSIBILITY AND BEAR COSTS FOR ANY CORRECTIONS OR DAMAGES RESULTING FROM THIS WORK.

TRISTAR ENGINEERING
Division of 1041548 Ontario Limited
8901 Woodbine Avenue, Unit #207
Markham, Ontario
Canada, L3R 9Y4
(905) 604-3801
Fax (905) 604-3954

PROJECT
AFFORDABLE HOUSING
1493 SIXTH LINE
OAKVILLE

DRAWING
FIXTURE'S CUT SHEET

DATE: JUN. 2025	PROJECT NO: 2025-074
DRAWN: D.P.	
CHECKED: J.P.	DRAWING NO: LE-2
SCALE: N.T.S.	