


## SCHEDULE 1 TREE PROTECTION BARRIER

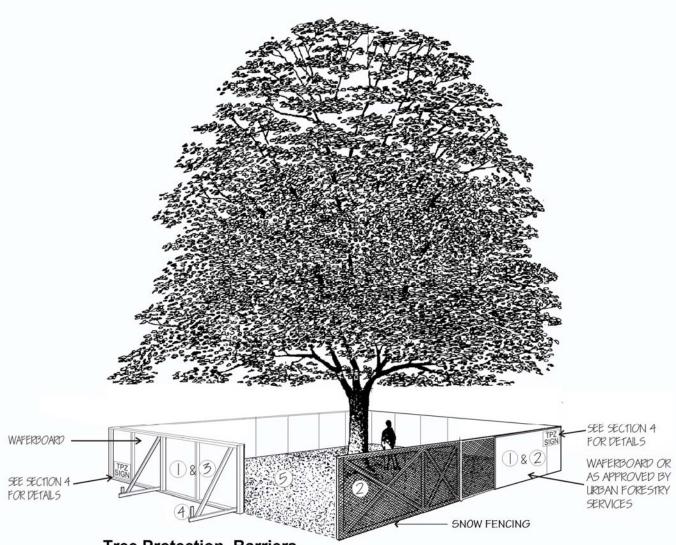

Tree Protection Barriers

PLYWOOD

- 1 Tree protection barriers must be 1.2m (4ft) high, waferboard hoarding or an equivalent approved by Urban Forestry Services.
- 2 Tree protection barriers for trees situated on the Town road allowance where visibility must be maintained can be 1.2m (4ft.) high and consist of plastic web snow fencing on a wood frame made of 2"x 4"s.
- (3) Where some excavate or fill has to be temporarily located near a tree protection barrier, plywood must be used to ensure no material enters the Tree Protection Zone.
- 4 All supports and bracing should be outside the Tree Protection Zone. All such supports should minimize damaging roots outside the Tree Protection Barrier.
- (5) No construction activity, grade changes, surface treatment or excavations of any kind is permitted within the Tree Protection Zone.