

**PLANT LIST**

BOTANICAL NAME	COMMON NAME	QUANTITY	HEIGHT	CONDITION
SHRUBS				
Diervilla lonicera	Bush Honeysuckle	4	60 mm	Pot

**NOTES:**

- Plant material to conform to the Canadian Nursery Trades association metric Guide Specifications for Nursery Stock, latest edition.
- Contractor to verify quantities listed: plant quantities to be supplied as shown in plan in case of discrepancies between plan and quantities listed.
- All plant material to be sourced from nurseries with an 800km radius.
- Provide 2 year warranty for all plant material.

**LEGEND FOR LAYOUT PLAN**


- Existing Trees to be preserved
- Proposed Deciduous Tree
- Existing Contours
- Existing Spot Elevations
- Proposed Contours
- Proposed Spot Elevations
- Proposed Slopes
- Concrete Paving
- Asphalt Pathway
- 150mm Depth Topsoil, Finegrade and Sod
- 300mm Depth Sand/Topsoil Soccer Field Mix
- 1800mm Ht. Modular Construction Fencing
- 100mmØ Corrugated, Perforated, sock covered, PVC drainage pipe. Min. slope 0.5%
- 150mmØ Corrugated, Non-perforated, PVC drainage pipe. Min. slope 0.5%

Note: All Drawings by Baker Turner inc. to be Printed in Colour.

**REVISIONS**

DATE	DESCRIPTION
2023.06.01	Issued for Construction
2022.02.28	Issued for Addendum #2
2022.02.22	Issued for Addendum #1
2022.01.03	Issued for Tender
2022.12.06	Issued for Tender Review
2022.10.19	Issued for CH Permit Application
2022.06.30	Issued for Submission
2022.05.13	Issued for Client Review
2022.05.12	Issued for Client Review

NOTE: Contractor is to check and verify all dimensions and conditions on the project, and is to immediately report any discrepancies to the landscape architect before proceeding with the work.

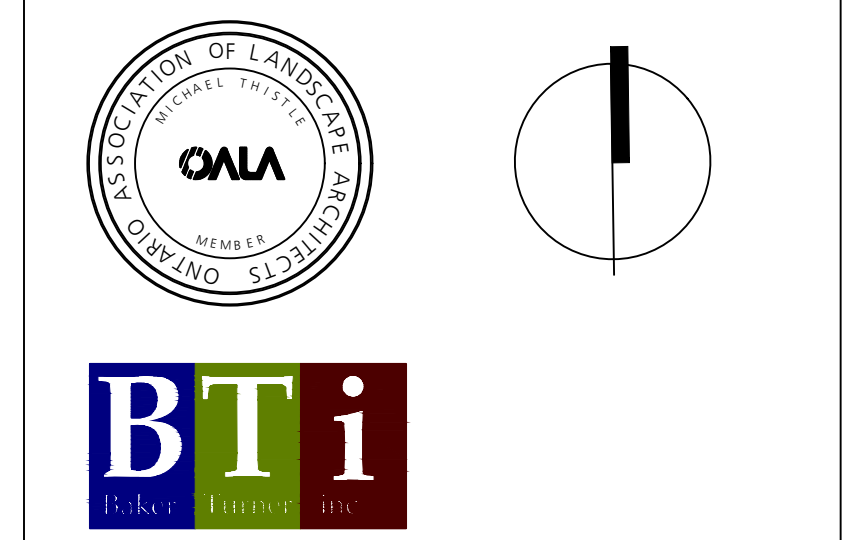

Landscape Architecture | Site Design  
 Suite 234  
 2010 Winston Park Drive  
 Oakville Ontario L6H 5R7  
 Tel: (289) 291-7620  
 email: tba@bakerturner.com

**Project Title**

**Oakville Park Soccer**  
 1055 McCraney St E  
 Oakville, ON  
 Layout Plan

Date	Issued
Jan 2022	
Job Number	Drawn By
BTI-1616	JW, EO
Scale	Checked By
As Shown	MT
Sheet Number	File Number
L1 of 2	CH file PA/22/O/92

Remove chain link fence and concrete footings, and dispose of off-site

Exact location of asphalt paving where it enters the woodlot is to be determined on site with LA and Owner

Removable soccer goal posts by Flexo or approved equal (typ.) Model: SGM 6x12R.

- 3 SAND/TOPSOIL SOCCER FIELD MIX w. SUB-DRAINAGE (typ.)
- 150mm Depth Topsoil, Finegrade and Sod (typ.)
- 8 CONCRETE PAVING AND REFEREES BENCH (typ.)
- 6 CONCRETE PAVING AND PLAYERS BENCH (typ.)
- 7 MOLOK CONTAINERS W. CONCRETE APRON (1 waste, 1 recycle)
- 9 CONCRETE PAVING AND BLEACHERS (typ.)



All stripped grass within the limit of contract shall be disposed of off site. ONLY the top 100mm topsoil stripped within existing soccer fields shall be used in the sports field mix for the new soccer fields. All other stripped topsoil within the limit of contract shall be used for new sod or disposed of off site if not needed. If required, import new topsoil and sports field mix approved by the Consultant to complete the construction.