



EY	TREE #	Botanical Name	Common Name	Size/Remarks	Qty	Soil Vol. (m3)	Soil Vol. (m3) per tree	Crown Area per tree (m2)	Canopy Area Sub- total (m2)	% of Tota Canopy Area
mall Stat	ture Trees (3-9m s	pread)								
QR	1-9	Quercus rubra	Red Oak	70mm cal., W.B.	9	196.0	22.0	154.0	116	31.0%
UP	10-12	Ulmus Pioneer	Pioneer Elm	70mm cal., W.B.	3	90.0	30.0	154.0	77	20.5%
AF	13-14	Acer x freemanii	Freeman Maple	70mm cal., W.B.	2	40.5	20.0	78.5	91	24.5%
со	15-16	Celtis occidentalis	Common Hackberry	70mm cal., W.B.	2	46.0	23.0	154.0	90	24.0%
				Total Trees:	16				373	
		CANOPY SUMMARY								
				OTAL TREES ON SITE	16				373	
		OVERLAP AREA (m2) TOTAL CANOPY m2 (excluding overlap)							0 373	-
		TOTAL CANOPT IIIZ (excluding overlap)								
		EXISTING CANOPY SUMMARY								
		EXISTING CANOPY ON SITE (1.5 Bounus factor included)							0	
			EXISTING CANOPY	OVER HANGING SITE					0	
			TOTAI	EXISTING CANOPY					0	
			TOTAL PROPOSED 8	EXISTING CANOPY					373	
anopy S	Summary									
							1,633			
		Site Canopy Cover							<u>22.9%</u>	
			Land use 0	Canopy Cover Target					20%	


Contractor shall check all dimensions on the work and report any discrepancy to the Landscape Architect before proceeding. All drawings and specifications are the property of the Landscape Architect and must be returned at the completion of the work. This drawing is not to be used for construction until signed by the Landscape Architect.

Key

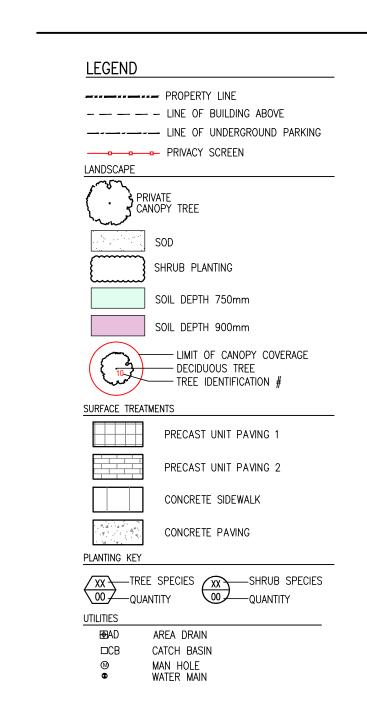

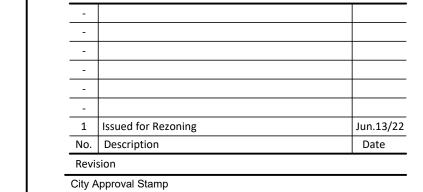





NAK design strategies

421 RONCESVALLES AVENUE, TORONTO, ON M6R 2N1 CANADA T 416.340.8700 F 416.340.7100 NAKDESIGNSTRATEGIES.COM

Project

Roseville Properties Inc.
Robinson Street, Oakville, Ontario

le

Tree Canopy and Soil Volume Plan

Date	06/13/22
Scale	1:150
Drawn	an
Checked	rn
Job No.	22-001

L1.2